

202 216 218 File : Edit: Type of Service Customer: Clear Language Heb 204 HiGain/LoopStar.HDSL2 Lina Rala: 196 kij 200 Unit of Measure | kilofeel / 🔻 Cable Lengths (K/t) CO Wring 206 Span 1: 716 Cable Type: PIC T Landerground Temperature: 68° F/20° C · Underground Cable Loss (dB) Span Cable Langths (K/I) OC Loop Res. (Ohms) --26 AWG (.40mm) 0.00 24 AWG (.51mm) 0.00 0.00 22 AWG (.64mm) 0.00 C'25,000 116 19 AWG (.91mm) 0.00 18 AWG (1 0mm) 125 - 20 00 17 AWG (1:2mm) **327000** €. BridgeTap Gauge Change: F.0.00
Bridged Tap: 30.00 Cabla Gauge Changes: Bridge Tap Span Length Span Resistance 32740.000 Bridge (ap Length Unknown Total Circuit Paramoters Length: 0.300 Res. 26(.40) PIC 3773 10:85 75 7 15:57 Loss 26(.40) PIC Bridge Tep Length(M) Uccation Distance ZSAVG Equivalent Internation (M) 20064 B From CO From CD 0 Fig. 2 OK . - Clear,

Fig. 3

Fig. 1

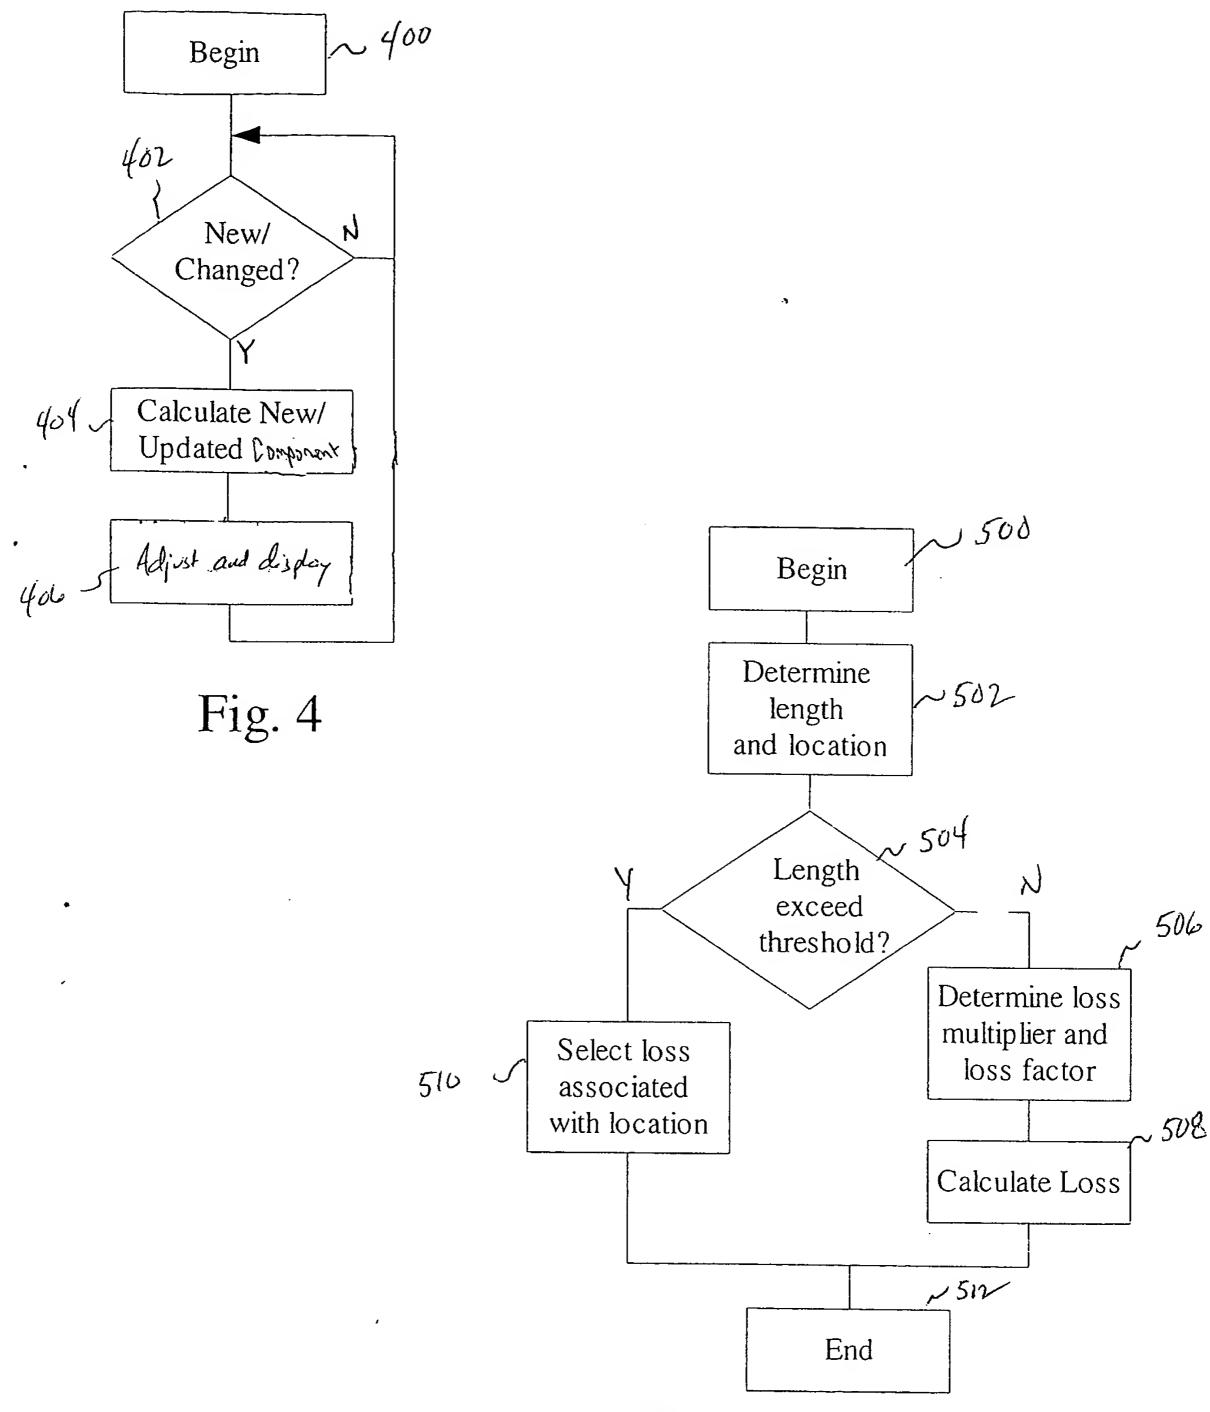


Fig. 5

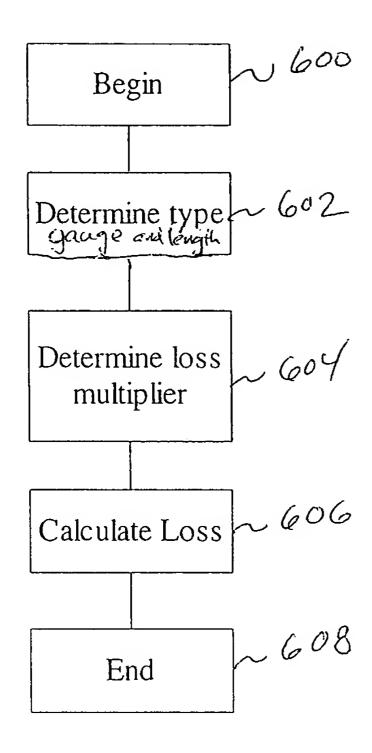


Fig. 6

